

PRODUCT DATASHEET

FI100

CONVENTIONAL REMOTE INDICATOR


The FI100 is a low profile remote indicator which can be connected to the Argus detector base to provide the remote indicator functionality. The typical application is for outside rooms fitted with fire detection or below loft or void areas fitted AFD devices.



KEY FEATURES

- Low profile design
- Red indicator
- Compatible with the full range of Argus wired fire detectors with remote alarm indicators (conventional and intelligent)
- No programming required

TECHNICAL INFORMATION

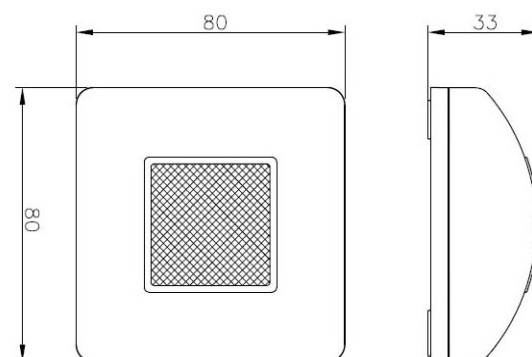

TECHNICAL SPECIFICATION

- | | |
|------------------------------------|------------------------|
| ■ Operating voltage | 15VDC-40VDC |
| ■ Average current | 4.5mA@24VDC |
| ■ Dimensions | 80mm x 80mm x 27mm |
| ■ Weight | 30g |
| ■ Cable size | 0.5-2.5mm ² |
| ■ Operating Temperature (no icing) | -10°C to +55°C |
| ■ Max humidity (non condensing) | 95% RH |
| ■ IP Rating | 42 |

STANDARDS & APPROVALS

- BS EN 50130-4:2011 Part 4 Alarm systems - Electromagnetic compatibility

